

3 WAY FILTER TAP COLLECTION



Pictured FWL Dolomite
Pull Out Spray

FWL MODERN TAP

THREE WAY TAP



Modern in
Brushed Brass Finish
Part # 518102




Chrome Plated finish
Part # 518104



Matt Black Finish
Part # 518106



Brushed Nickel Finish
Part # 518108

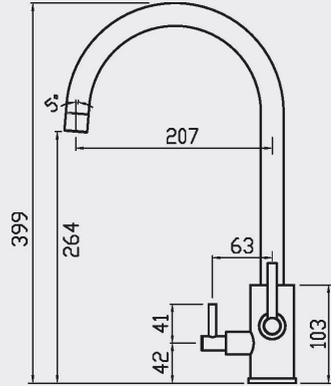


SPECIFICATIONS

Minimum Water Pressure 0.5 Bar.

Normal operating pressure range
1.0 – 5.00 Bar.

Max Temp 70°C.

Hole required is standard 35mm
diameter.

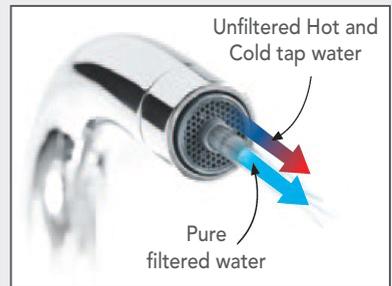

Supplied with Connection Hoses
as standard for ease of installation.

PVD COATING on Brushed Brass
and Brushed Nickel finishes to help
withstand surface damage and
improve hygiene.

FWL DOLOMITE - PULL OUT SPRAY

THREE WAY TAP WITH PULL OUT SPRAY



Dolomite in
Brushed Brass Finish
Part # 518122




Chrome Plated finish
Part # 518124



Matt Black Finish
Part # 518126



Brushed Nickel Finish
Part # 518128

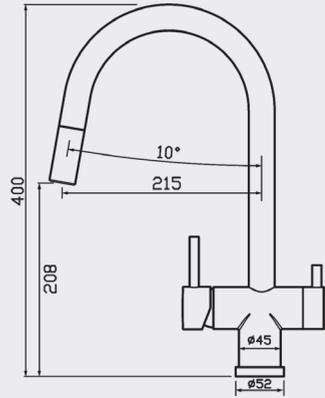

SPECIFICATIONS

Minimum Water Pressure 1.5 Bar.

Normal operating pressure range
1.5 – 5.0 Bar.

Max Temp 70°C.

Pull out spray extends to 300mm.

Hole required is standard 35mm
diameter.



Supplied with Connection Hoses
as standard for ease of installation.

PVD COATING on Brushed Brass
and Brushed Nickel finishes to
help withstand surface damage
and improve hygiene.

FWL AQUALARIA TAP

THREE WAY TAP

SPECIFICATIONS

Minimum Water Pressure 1.0 Bar.

Normal operating pressure range
1.0 – 5.0 Bar.

Maximum Temperature 80°C.

Hole required is standard 35mm
diameter.

Manufactured from Stainless steel
for strength and hygiene.


Filtered water connection is
"Metal Free."

Supplied with Connection Hoses
as standard for ease of installation.



Aqualaria Stainless Steel Tap Part # 518010

Brushed Stainless Steel Finish

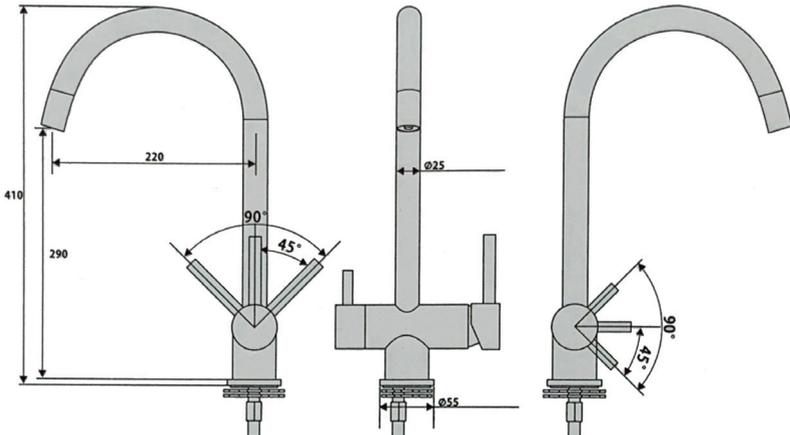


FWL ALTEA TAP

THREE WAY TAP



Altea Stainless Steel Tap Part # 518012

Brushed Stainless Steel Finish

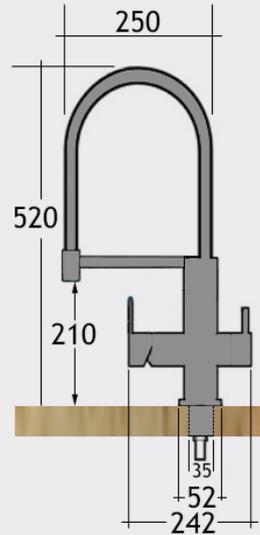

SPECIFICATIONS

Minimum Water Pressure 1.0 Bar.

Normal operating pressure range
1.0 – 5.0 Bar.

Maximum Temperature 80°C.

Hole required is standard 35mm
diameter.

Manufactured from Stainless steel
for strength and hygiene.

Filtered water connection is
"Metal Free."

Supplied with Connection Hoses
as standard for ease of installation.

FWL COTTAGE TAP

THREE WAY TAP



Cottage in
Brushed Brass
Finish
Part # 518114




Chrome Plated finish
Part # 518116



Brushed Bronze Finish
Part # 518118



Brushed Nickel Finish
Part # 518120

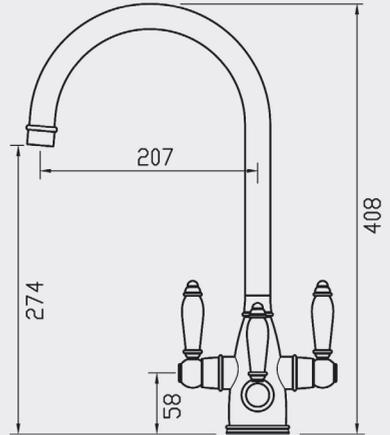

SPECIFICATIONS

Minimum Water Pressure 0.5 Bar.

Normal operating pressure range
1.0 – 5.0 Bar.

Max Temp 70°C.

Hole required is standard 35mm
diameter.

Supplied with Connection Hoses
as standard for ease of installation.

PVD COATING on Brushed Brass
and Brushed Nickel finishes to
help withstand surface damage
and improve hygiene.

FWL CLASSIC TAP


THREE WAY TAP



Classic in Brushed
Nickel Finish
Part # 518110



Chrome Plated finish
Part # 518112

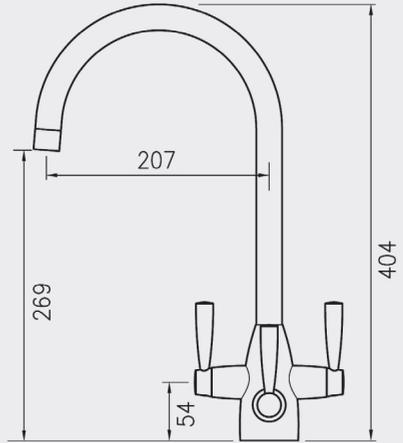

SPECIFICATIONS

Minimum Water Pressure 0.5 Bar.

Normal operating pressure range
1.0 – 5.0 Bar.

Max Temp 70°C.

Hole required is standard 35mm
diameter.

Supplied with Connection Hoses
as standard for ease of installation.

PVD COATING on Brushed Nickel
finishes to help withstand surface
damage and improve hygiene.



Supplier details